



SPECIFICATION CONTROL DRAWING

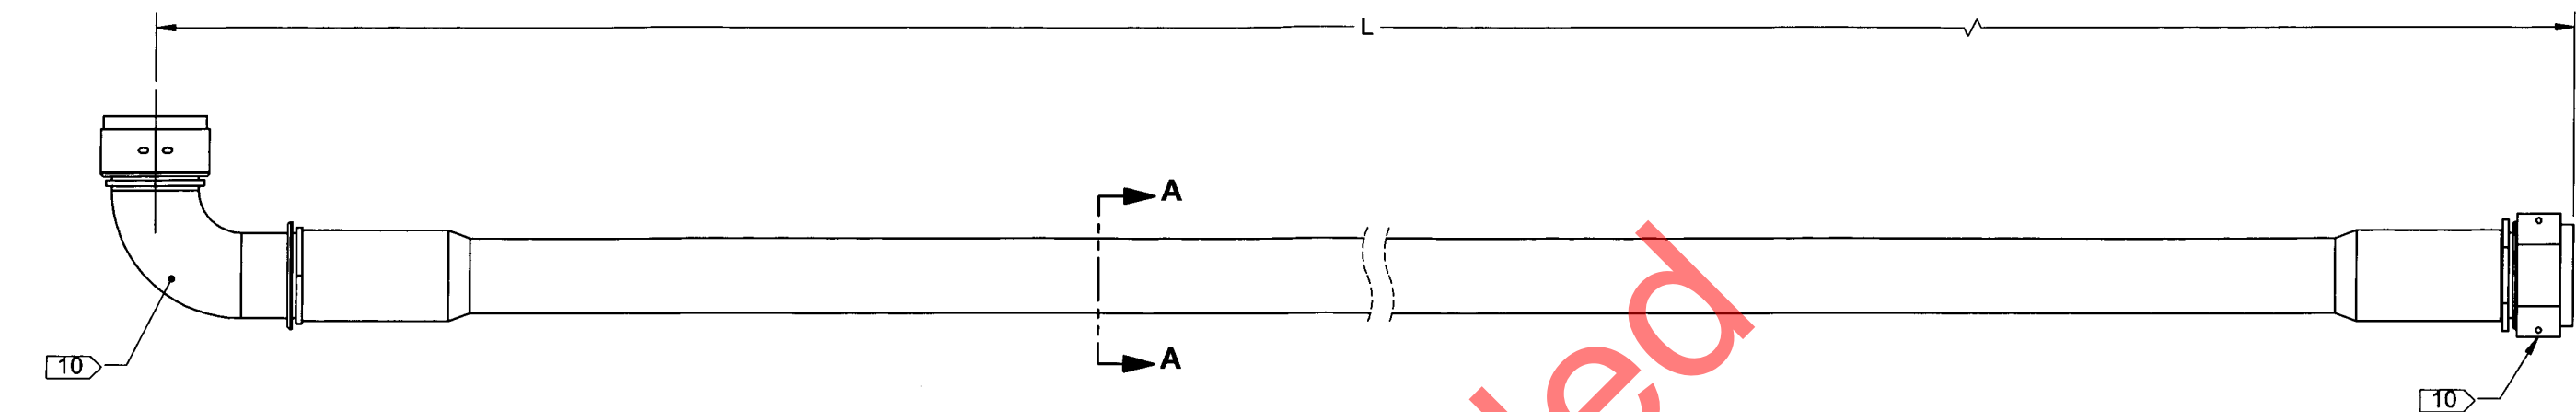

D4943-XX FLEX HOSE

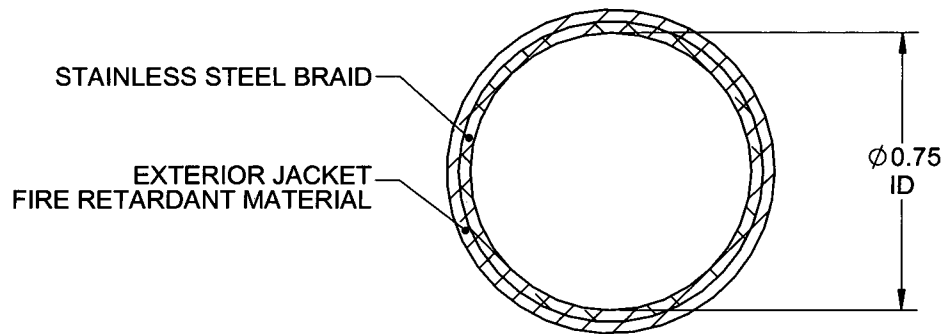

DART P/N	L	VENDOR	VENDOR P/N	WEIGHT
D4943-1	40.00	SWAGELOK	SS-FJ12TA12AS12-40F	3.0 lbs

NOTES:

- 1) MATERIAL: BRAID: STAINLESS STEEL PER MANUFACTURER  
JACKET: FIRE RETARDENT MATERIAL PER MANUFACTURER  
END FITTING: STAINLESS STEEL PER MANUFACTURER
- 2) FINISH: N/A
- 3) TOLERANCES: N/A
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: N/A
- 6) IDENTIFICATION: PER QSI 044 6.1.
- 7) WEIGHT: SEE TABLE
- 8) MAXIMUM OPERATING TEMPERATURE 500 °F
- 9) MAXIMUM OPERATING PRESSURE 120 PSI
- 10) END FITTING REQUIREMENTS: FEMALE, 3/4, 37 ° JIC FITTING (THREAD 1-1/16 UN), WITH LOCKWIRE HOLES

A	NEW ISSUE	AJS	13.09.18
REV.	DESCRIPTION	BY	DATE
DESIGN	AS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED	AP	DRAWING NO.	REV. A
MFG. APPR.	JLM	D4943	SHEET 1 OF 1
APPROVED	MP	TITLE	SCALE
DE APPR.	DS	FLEX HOSE	NTS
DATE	13.11.06	COPYRIGHT © 2013 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	